





Efficient and User-friendly

Postek R120 External Label Rewinder features Auto-adaptive speed technology to automatically adjust rewinding speed to the printer's printing speed.

It is the perfect complement to the exceptional performance of any barcode label printer with label width of 2.5 cm to 12 cm, and its maximum rewinding speed reaches up to 10 ips.





Safe and Durable

Postek A Series Rotary cutter is designed as a value-added accessory for special applications to Postek barcode label printers.

All metal blade and rotary cutter design assures its trust-worthy proficiency. It is safe to use with the patent structural design.

POSTEK Ribbon





Original and Affordable

Postek original high quality ribbon provides an affordable choice to ensure perfect printouts while effectively protecting the printhead to extend its life.

SPECIFICATIONS

R120

External Label Rewinder


Mode	R120		
Max Rewinding Speed	10 ips (254 mm/s)		
Label Width	0.98″ – 4.72″ (25 mm – 120 mm)		
Max Rewinding OD	8″ (203 mm)		
Max Rewinding ID	3" (76.2 mm)		
Dimension	W 8.66" × D 10.31" × H 9.13"		
Weight	4.2 kgs		

A150/A400	Mode	A150	A400	
Rotary cutter	Applicable Label	Uncontinuous adhesive labels (cut on liner only)		
		Unadhesive media, e.g. wash label, card paper		
	Max Cutting Width	4.72″ (120 mm)		
	Min Cutting Height	0.79″ (20mm)		
	Max Media Thickness	0.005″ (0.15 mm)	0.014″ (0.35 mm)	
	Applicable Models	C168 Series, G Series, TX Series, TXr Series		

ACCESSORIES

	Q8 Series	C168 Series	EM Series	G Series	TX(r) Series	iQ Series
External Label Rewinder		•				
Rotary Cutter						
Guillotine Cutter						
External Media Stand						
Media Guide Adaptor						
Centronics Parallel						
Ethernet Board	•	•	•		•	•

Standard Optional

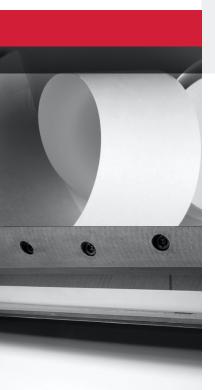

POSTEK

POSTEK ELECTRONICS CO., LTD.

Wisdom Plaza, Block B, Tower 2, 18th Floor Qiaoxiang Road, Nanshan District, Shen Zhen, Guang Dong, China

T +86-755-83240988 F +86-755-83202898

WWW.POSTEKCHINA.COM